

Oak Abbey



A range of rustic floors with one thing in common: they look like truly time-worn floors.

Striking solid timber floors featuring rectangular oak inserts (with optional metal inserts for an industrial look) and shrunken knots. Their undulating surface makes for out-of-the-ordinary antique-looking floors.



Battle



Furness



Hailes



Kirkham



Roche

Planks: £224 sqm

Widths available: Only available in mixed widths, 3 widths supplied between 200-280mm

Thickness available: 22mm Solid Oak

Rustic grade with shakes & cracks. Battle, Furness, Hailes, Kirkham all have endgrain and metal inserts as standard.

Prices do not include VAT or delivery

Rustic engineered floors with a top layer of reclaimed oak salvaged from old train wagons. Random horizontal saw marks are a feature of these boards.



Cleeve



Ennis



Fore



Quin

Planks: £164 sqm ex VAT

Widths available: Only available in mixed widths, 3 widths supplied: 160/185/220mm

Thickness available: 16mm

Duplex engineered

Prices do not include VAT or delivery




These engineered floors have a top-layer of new oak but look as if they have seen decades of life, even showing traces of previous finishes. Available in plank as well as herringbone or chevron parquet.



Melrose



Netley

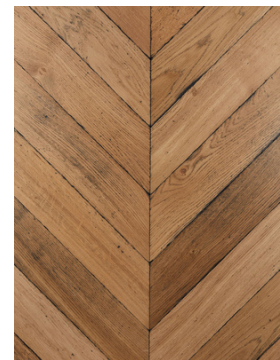

Tintern

Planks from: £124 sqm

Widths available: 160mm, 185mm, 190mm, 220mm, 250mm, 260mm

Thickness available: 16 and 20mm

Duplex engineered

Herringbone & Chevron: From £139 sqm

Sizes available: Herringbone 100mm x 600mm, Chevron 100mm x 500mm

Thickness available: 15mm

Duplex engineered

Prices do not include VAT or delivery

An engineered floor with reclaimed oak salvaged from train wagons featuring a matt, tactile surface. Open or larger low-filled knots – unsound knots are finished with neat round oak infills. Rounded edges and shakes with a slightly undulating surface.



Bretton



Mill



Tally

Planks from: £234 sqm

Widths available: 190mm, 210mm, 230mm, 250mm

Thickness available: 20mm

Duplex engineered

Prices do not include VAT or delivery

Technical Specifications

SPECIES	European oak
CERTIFICATION	Not Certified
APPLICATION	Commercial and residential (Indoor)
CONSTRUCTION	Solid or Duplex engineered 4 or 6mm top layer oak
BEVEL	Hand scraped as standard
INSTALLATION TECHNIQUE	Nail, glue bonding or floating
SUITABLE FOR UFH	Yes, when duplex engineered
FIRE CLASSIFICATION	EN: 13501: Dfl-S1
THERMAL CONDUCTIVITY	0.119-0.17 λ W/mK
HARDNESS	4,982 N (Janka)

Timber floors are easy to care for, please call us for further information on the best way to look after your floor.

Timber is a living material. A wooden floor, although no longer growing as part of a tree, is still very much part of its environment. As such, it responds to the light, temperature, humidity and wear to which it is exposed.

As the floor ages the colour of the wood will mellow and change. This is a natural process that occurs as the surface of the wood is exposed to oxygen in the air and to ultraviolet light from the sun. Painted surfaces, upholstery, furniture and rugs all undergo this same process over time.

After a number of years you may wish to have the floor surface sanded down and re-finished. You could then choose to re-oil the floor or have it stained first or even re-finished in lacquer.



West:
61 Paddington St
London W1U 4JD
020 7486 4838

East:
7a Ezra Street
London E2 7RH
020 7221 8188

Registered in England & Wales: Solid Floor Ltd. 7a Ezra Street, London E2 7RH
Company Reg No: 03287805 | VAT Reg No: 710 4793 50
FSC® licence: C117337 | FSC COC: CU-COC-828136 | PEFC COC: CU-PEFC-828136
solidfloor.co.uk sales@solidfloor.co.uk  solidfloor  solidfloor