

Southern Forests

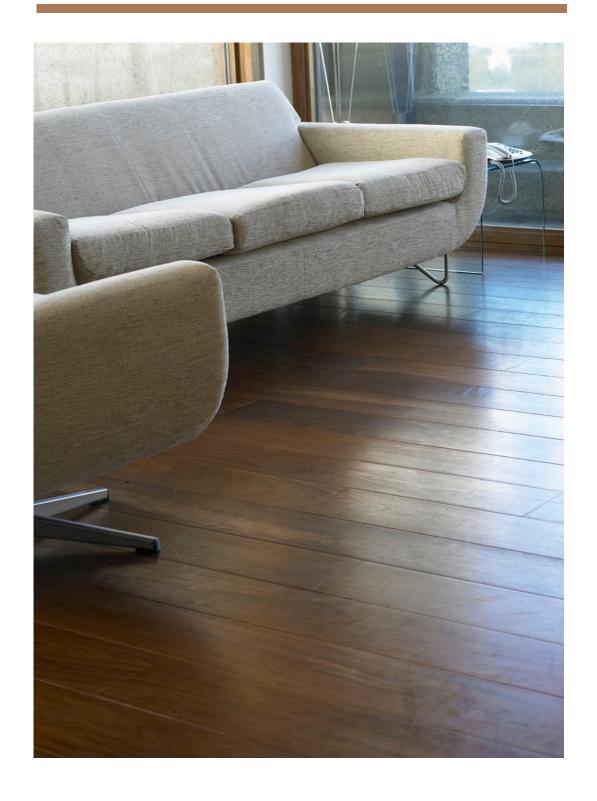

These floors from the Southern Hemisphere showcase some of the world's more distinctive hardwoods.

Some are finished in clear oils, enhancing their natural lustre. Others are bleached and treated with reactive stains to create contemporary, matt and chalky surfaces.

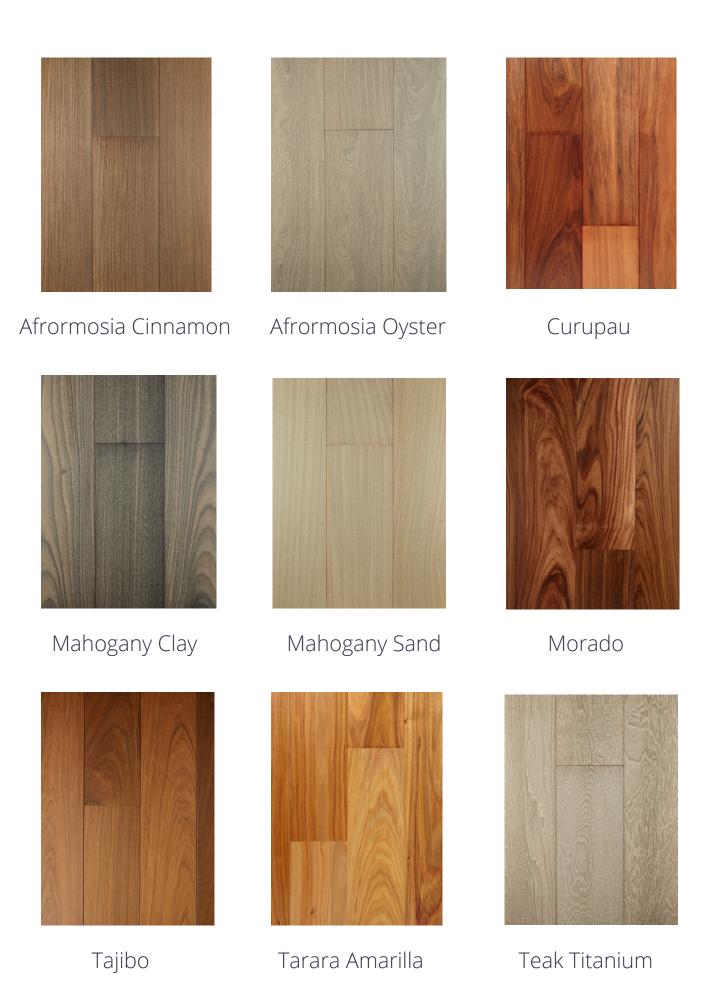

Planks: From £104sqm

Widths available: 135mm, 180mm, 220mm

Thickness available: 15 & 20mm

Duplex engineered

Herringbone: From £104sqm

Sizes available: 135 x 590/600mm

Thickness available: 15mm

Duplex engineered

Prices do not include VAT or delivery

Technical Specifications

CERTIFICATION Some are FSC Mix Credit

APPLICATION Commercial and residential (Indoor)

CONSTRUCTION Duplex engineered 4 or 6mm top layer oak

BEVEL Micro Bevel as standard

INSTALLATION TECHNIQUE Nail, glue bonded or floating

SUITABLE FOR UFH Yes, when duplex engineered

FIRE CLASSIFICATIONEN: 13501: Dfl-S1THERMAL CONDUCTIVITY0.119-0.17 λ W/mK

HARDNESS (Janka) Afrormosia: 6980N, Curupau: 16150N,

Mahogany: 4020N, Morado: 8710N, Tajibo: 15620N

Tarara Amarilla: 6750N, Teak: 4740N

Timber floors are easy to care for, please call us for further information on the best way to look after your floor.

Timber is a living material. A wooden floor, although no longer growing as part of a tree, is still very much part of its environment. As such, it responds to the light, temperature, humidity and wear to which it is exposed.

As the floor ages the colour of the wood will mellow and change. This is a natural process that occurs as the surface of the wood is exposed to oxygen in the air and to ultraviolet light from the sun. Painted surfaces, upholstery, furniture and rugs all undergo this same process over time.

After a number of years you may wish to have the floor surface sanded down and refinished. You could then choose to re-oil the floor or have it stained first or even refinished in lacquer.



